

D	DOC NO	MODEL	NAME	REV.	PAGE
PULOON TECH	PL-ECDM-200-002	ECDM-200	Product Specification	1.1	1 of 9

# **Product Specification**

MODEL : ECDM-200

REV. : 1.1

DATE : 2007. 01. 25







DOC NO	MODEL	NAME	REV.	PAGE
PL-ECDM-200-002	ECDM-200	Product Specification	1.1	2 of 9

# **Revision History**

Ver.	DATE	Title	Details	Name	
1.0	2006.04.03	Released		H. H. SO	
1.1	2007.01.25	Ch 2.1.11 Added	Max Dispensing Description Added	H. H. SO	





DOC NO	MODEL	NAME	REV.	PAGE
PL-ECDM-200-002	ECDM-200	Product Specification	1.1	3 of 9

# **Contents**

1	Pre	view and Features	4
	1.1	Preview	4
	1.2	Features	4
2	Spe	ecifications	5
	2.1	General Specifications	5
	2.2	Electrical Features	
	2.3	Operation Environment	
3	Lay	out	6
4	Cor	nnector Specifications	7
		Power Connector	
	4.1		
	4.2	Communication Connector	
	4.3	Serial Communication Specifications	
	44	Din Switch Assignment	9



D	DOC NO	MODEL	NAME	REV.	PAGE
PULOON TECH	PL-ECDM-200-002	ECDM-200	Product Specification	1.1	4 of 9

#### 1 Preview and Features

#### 1.1 Preview

ECDM-200 is the cash-dispensing unit that can be applied to ATM and notes exchanger for retail market. The main function is to dispense the exact number of banknotes in the cassette by a customer's request and to transfer to the customer automatically.

#### 1.2 Features

- 1) To separate notes by friction rollers
- 2) To prevent from double dispensing case by mechanical double detect mechanism
- 3) To implement mold guides and paths to minimize jam occurrence
- 4) To maximize convenience in maintenance or clearing by opening guide structure
- 5) To realize compact and slim size so as to be applied to even small space
- 6) To speed at a rate of 4 notes/sec
- 7) After power failure, bills on the path are rejected to reject cassette when power turns on again (Auto Reject Function)



D	DOC NO	MODEL	NAME	REV.	PAGE
PULOON TECH	PL-ECDM-200-002	ECDM-200	Product Specification	1.1	5 of 9

# 2 Specifications

# 2.1 General Specifications

2.1.1 Denomination 2 I	Denomination
2.1.2 Cassette Capacity 21	14mm
2.1.3 Dispensing Speed 4 i	notes/sec
2.1.4 Usable Note Size W	/idth : 100 ~ 162mm
He	eight: 62 ~ 78mm
2.1.5 Double Feeding Detection Me	lechanical type
2.1.6 Reject Capacity Ab	bout 50 notes
2.1.7 Access Type Fr	ront Access Type
2.1.8 Dimension (unit: mm) 27	70.5(W) x 356(H) x 420(D)
2.1.9 Interface RS	S 232C
2.1.10 Near-end Detection (Selectable, Refer to Chap	pter 4.4 )
Near-end Disabled All notes are dispensed	d until Bill-end.
2) Near-end Enabled 50 or 150 notes* will be	e left and it stops.
* The remaining amount will be decided to the po	osition of Near-end sensor.
2.1.11 Max. Dispensing per Transaction	00 Notes

#### 2.2 Electrical Features

2.2.1	Rated Voltage	DC24V±10%
2.2.2	Rated Consuming Current	
	- Standby Status	160 mA
	- Average Current, continuous	3900mA
	- Average Current, peak	5500mA

## 2.3 Operation Environment


2.3.1	Operation Temperature	+ 5°C ~ +40°C
2.3.2	Storage Temperature	-10℃ ~ +60℃
2.3.3	Operation Humidity	20% ~ 80% RH
2.3.4	Storage Humidity	10% ~ 90% RH






D	DOC NO	MODEL	NAME	REV.	PAGE
PULOON TECH	PL-ECDM-200-002	ECDM-200	Product Specification	1.1	6 of 9

# 3 Layout

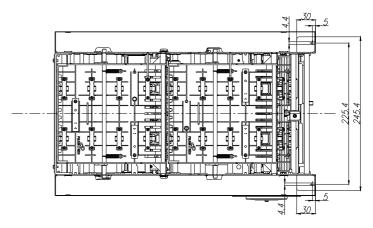

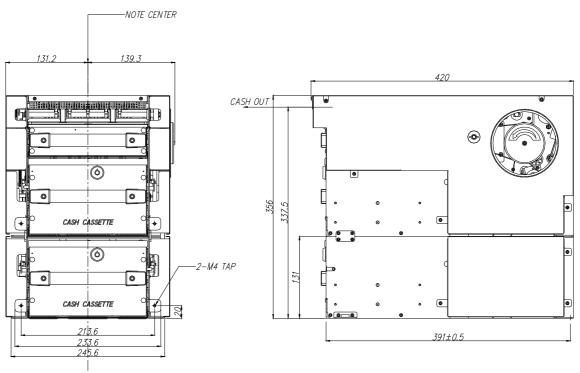



D	DOC NO	MODEL	NAME	REV.	PAGE
PULOON TECH	PL-ECDM-200-002	ECDM-200	Product Specification	1.1	7 of 9

### 4 Connector Specifications

#### 4.1 Power Connector

The power connector is positioned at the bottom of the ECDM-200 main Controller.

Connector on Controller : MOLEX 5566VWO-02

Matching Connector : MOLEX 5557D-02


Pin No	Function	
1	+24V	
2	GND	

#### 4.2 Communication Connector

The communication connector is positioned at the bottom of the ECDM MAIN Controller PCB. It is 9-way and D-type connector.

Pin No	Name	Function	
1		Not used	
2	RXD	Received data	
3	TXD	Transmitted data	
4		Not used	
5	GND	System ground	
6		Not used	
7		Not used	
8		Not used	
9		Not used	






# 4.3 Serial Communication Specifications

Baud rate	9600 bps	
Data bits	8 bits	
Parity	No parity	
Stop bits	1 stop bit	



PULOON TECH	DOC NO	MODEL	NAME	REV.	PAGE
	PL-ECDM-200-002	ECDM-200	Product Specification	1.1	9 of 9

### 4.4 Dip Switch Assignment

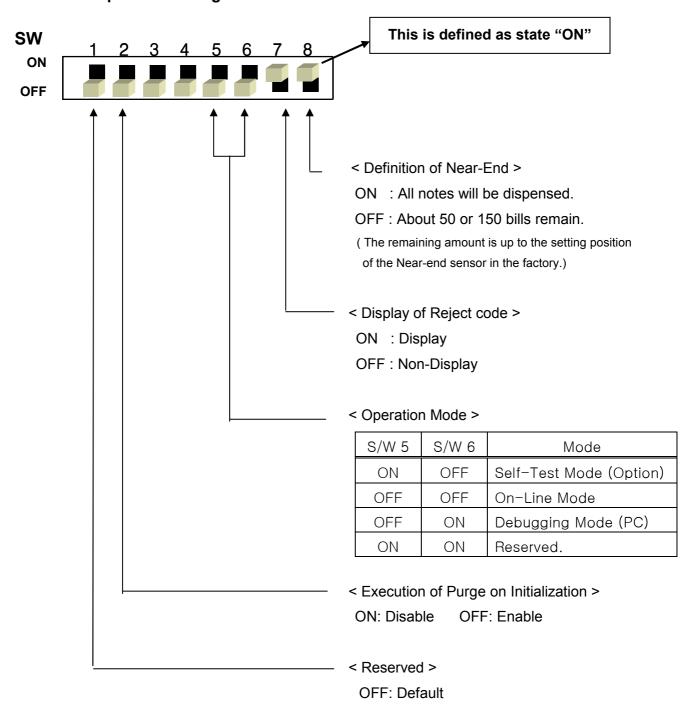

#### **CAUTION!**

Please turn on power again after changing the Dip Switch.